

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
12 May 2005 (12.05.2005)

PCT

(10) International Publication Number
WO 2005/043959 A1

(51) International Patent Classification⁷: H05B 6/18, 6/02

(21) International Application Number:
PCT/GB2004/004493

(22) International Filing Date: 22 October 2004 (22.10.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0324831.7 24 October 2003 (24.10.2003) GB

(71) Applicant (for all designated States except US): BRITISH
NUCLEAR FUELS PLC [GB/GB]; Sellafield R & T
North, B141 Sellafield, Seascate, Cumbria CA20 1PG
(GB).

(72) Inventors; and


(75) Inventors/Applicants (for US only): TIVEY, Neil, An-
THONY [GB/GB]; BNFL, Hinton House, Risley, Warrin-
gton WA3 6AS (GB). MAYBURY, Kevin [GB/GB]; BNFL,
Hinton House, Risley, Warrington WA3 6AS (GB).

(74) Agent: HARRISON GODDARD FOOTE; 31 St.
Saviourgate, York YO1 8NQ (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

[Continued on next page]

(54) Title: INDUCTION HEATING

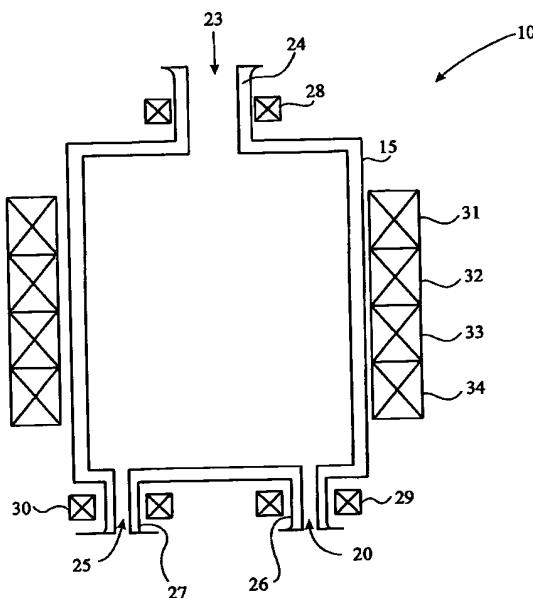

(57) Abstract: A method and apparatus for melting glass are disclosed. The method includes the steps of providing a current conducting melting vessel within which glass can be melted, providing at least two induction heating coils at selected locations proximate to the melting vessel and selectively supplying power to the coils to thereby selectively energise the coils whereby the mutual induction of current in a non-energised heating coil adjacent to an energised heating coil is prevented via a switching element in power supply circuitry associated with the non-energised coil.

WO 2005/043959 A1



(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*